

SU650 Solid State Drive

FIRST SSD? GREAT TIMING!



Ultimate SU650 3D NAND SSD

The Ultimate SU650 solid state drive implements 3D NAND Flash and a high speed controller, offering capacities up to 2TB. It delivers read/write performance up to 520/450MB/s and greater reliability than 2D NAND SSDs. The SU650 features SLC caching and advanced error correction technologies to ensure optimized data performance and integrity. For those who want to experience a clear PC upgrade, the SU650 is an excellent choice with a great cost-performance ratio.

Features

- 3D NAND Flash for higher durability and capacity
- Wide capacity range: 240GB to 2TB
- SLC caching: enhances transmission speed
- Advanced error correction
- Tougher, quieter, and more reliable than HDDs
- Supports ADATA proprietary software – “SSD Toolbox” and “Migration Utility”

Ordering Information

Capacity	Model Number	EAN Code
240GB	ASU650SS-240GT-R	4713218461162
256GB	ASU650SS-256GT-R	4711085931511
480GB	ASU650SS-480GT-R	4713218461179
512GB	ASU650SS-512GT-R	4711085931528
960GB	ASU650SS-960GT-R	4713218461186
1TB	ASU650SS-1TT-R	4711085940049
2TB	ASU650SS-2TT-R	4711085945884



Specification

- Capacity: 240GB / 256GB / 480GB / 512GB / 960GB / 1TB / 2TB
 - NAND Flash: 3D NAND
 - Interface: SATA 6Gb/s (SATA III)
 - Form factor: 2.5"
 - MTBF: 2,000,000 hours
 - Sequential read/write (Max.): R/W 520/450MB/s
 - Error correction: ECC
- Terabytes Written (TBW)(Max. capacity): 1120TB
 - Dimensions (L x W x H): 100.45 x 69.85 x 7mm
 - Weight: 50.8g / 1.79oz
 - Operating temperature: 0°C-70°C
 - Storage temperature: -40°C-85°C
 - Shock resistance: 1500G/0.5ms
 - Warranty: 3-year limited warranty
 - Certifications: CE, FCC, BSMI, KC, EAC, RCM, morocco, UKCA, VCCI


Performance

Capacity	Sequential Performance (Up to) ¹		TBW ²
	Read (MB/s)	Write (MB/s)	
240GB	520	450	140TB
256GB	520	450	140TB
480GB	520	450	280TB
512GB	520	450	280TB
960GB	520	450	560TB
1TB	520	450	560TB
2TB	520	450	1120TB

¹Performance may vary based on SSD capacity, hardware test platform, test software, operating system, and other system variables

²The value is the minimum amount of terabyte written that could be reached.

Schematics

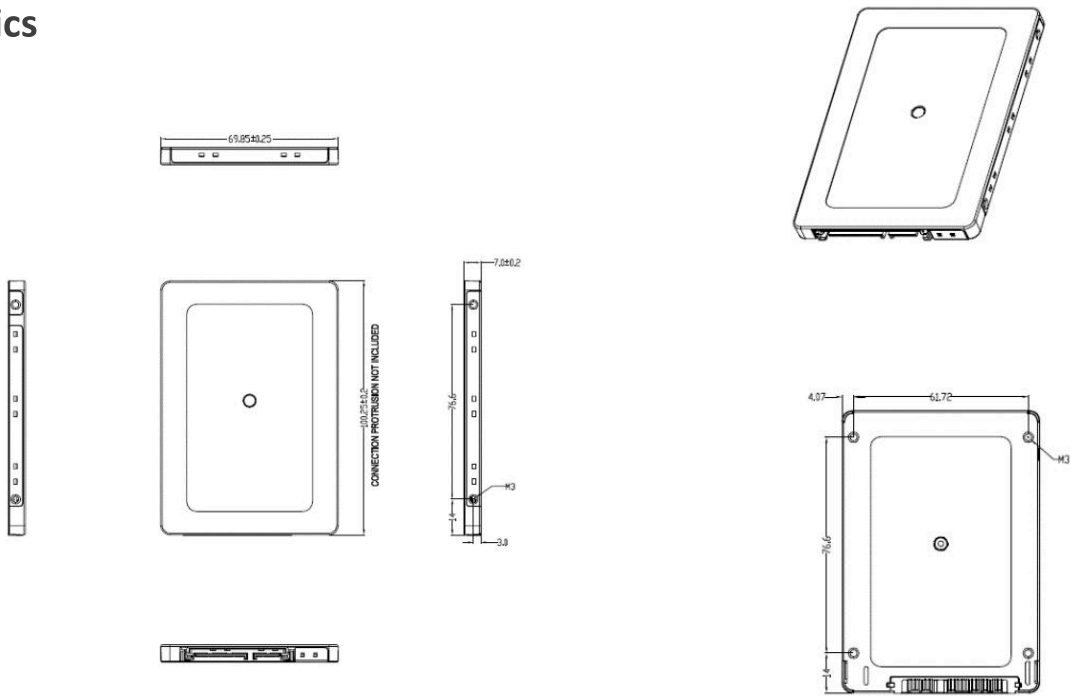

ADATA Technology Co., Ltd
2F, No.258 Liancheng Rd.,
Zhonghe Dist., New Taipei City 235, Taiwan
T: +886-2-8228-0886
F: +886-2-8228-0887
E: adata@adata.com

CAN ICES-3 (B)/NMB-3(B)

WARNING: Cancer and Reproductive Harm

www.P68Warnings.ca.gov

UK	REP	APEX OF SPECIALISTS LIMITED Address: 69 Princess Street, Manchester, M1 4DT, UK E-mail: adata_uk@apexofspecialists.com
EU	REP	ADATA Technology B.V. Address: Transpolderweg, Sierdsoord 17-07, 2132 WT Houdsbloep, The Netherlands E-mail: adata_europe@adata.com

MSIP-REM-A99-ASU650

RoHS

REACH

10

CE

UKCA

EAC

RCM

mo

VCCI

CE

FC